

Summary of U Value Calculation

Undertaken by Lee Watkinson, of Capital Windows & Conservatories (NW) Ltd
Reference Number: UPVC French Doors 001



Liniar Door: French Style 1 (15.1)

Calculation Date: 2024-02-12

Calculated following the principles of EN ISO 10077-1:2006

Basic Dimensions

Width of Opening: 2000 mm

Height of Opening: 2000 mm

Door Glazing Profile

Number of Spaces: 1 (Double Glazing)

Gas Temperature: 283.15 K (10°C)

Normal Emissivity of Internal Glass Surface: 0.89

Space	Width	Gas Type
1	20 mm	10% Air : 90% Argon


Space	e1	e2
1	0.89 (0.84 corr)	0.05 (0.06 corr)

Pane	Thickness
1	4 mm
2	4 mm

Total Thickness of Glazing: 28 mm


External Heat Transfer Coefficient: 25 W/m².K

Internal Heat Transfer Coefficient: 7.7 W/m².K



Configuration of Unit: Frame & Pane Areas

Numbers on each frame edge correspond to the Frame Side in the frame table on the next page, and Circled Numbers refer to the Pane in the panes table.

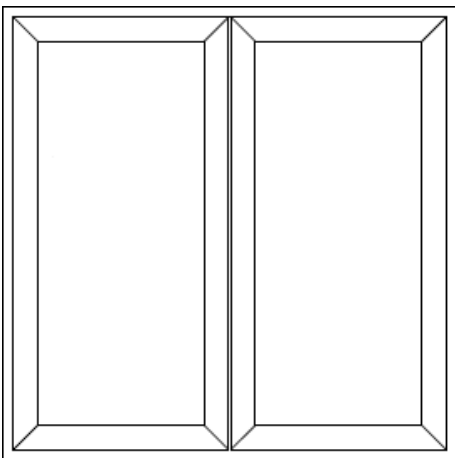

Summary of U Value Calculation (ctd)



Reference Number: UPVC French Doors 001

Liniar Door: French Style 1 (15.1)

Calculation Date: 2024-02-12

Door Frame

Side	A f,i	A f,e	A frame	Int. Frame W	Ext. Frame W	U frame
1	0.259 m ²	0.259 m ²	0.259 m ²	156 mm	156 mm	1.49 W/m ² .K
2	0.312 m ²	0.312 m ²	0.312 m ²	156 mm	156 mm	1.49 W/m ² .K
3	0.259 m ²	0.259 m ²	0.259 m ²	156 mm	156 mm	1.49 W/m ² .K
4	0.372 m ²	0.372 m ²	0.372 m ²	186 mm	186 mm	1.48 W/m ² .K
5	0.373 m ²	0.373 m ²	0.373 m ²	225 mm	225 mm	1.78 W/m ² .K

$$\sum A_{\text{frame}} : 1.574 \text{ m}^2$$

$$\sum A_{\text{frame}} : U_{\text{frame}} : 2.453 \text{ W/K}$$

Door Panes

Pane	Type	A panel	U panel	Perimeter	Spacer	PSI
1	Glass	1.213 m ²	1.219 W/m ² .K	4.554 m	Thermobar	0.032 W/m.K
2	Glass	1.213 m ²	1.219 W/m ² .K	4.554 m	Thermobar	0.032 W/m.K

$$\sum A_{\text{frame}} : 2.426 \text{ m}^2$$

$$\sum A_{\text{panel}} \cdot U_{\text{panel}} : 2.958 \text{ W/K}$$

$$\sum l_{\text{panel}} \cdot \psi_{\text{panel}} : 0.291 \text{ W/K}$$

Total Thermal Conductance of Glazing: 1.54W/m².K

Final U Value for Unit: 1.4 W/m².K